

VT-HCVR4104/4108C-S2-AR

4/8CH 720P-Lite Smart 1U HDCVI DVR

**Features**

- > Support HDCVI/Analog/IP Video input
- > H.264 dual-stream video compression
- > HCVR4104/4108C-S2: All channel 720P recording
- > HDMI/VGA simultaneous video output
- > 4/8 channel synchronous playback, GRID interface & smart search
- > ONVIF Version 2.4 conformance
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Support 1 SATA HDD up to 4TB, 2 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS)&Smart Phone(DMSS)

VT-HCVR4104/4108C-S2-AR


Technical Specifications

Model		VT-HCVR4104C-S2-AR	VT-HCVR4108C-S2-AR
System			
Main Processor		Embedded processor	
Operating System		Embedded LINUX	
Video			
Input		4 channel, BNC	8 channel, BNC
Standard	Analog	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)	
	HDCVI	720P HDCVI Camera	
	IP	1080P/720P/D1/CIF IP Camera	
Audio			
Input		1 channel, RCA	
Output		1 channel, RCA	
Two-way Talk		Reuse audio input/output channel 1	
Display			
Interface		1 HDMI, 1 VGA	
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768	
Display Split		1/4	1/4/8/9
Privacy Masking		4 rectangular zones (each camera)	
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
Recording			
Video/Audio Compression		H.264/G.711	
Record Rate	Main Stream:	720P/960H/D1(1~25/30fps)	1*720P(1~25/30fps)+7*(1~15fps)/960H/D1 (1~25/30fps)
	Extra Stream	CIF/QCIF(1~12/15fps)	
Bit Rate		80~4096Kb/s	
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop	
Record Interval		1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
Video Detection			
Trigger Events		Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips	
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank	
Playback & Backup			
Sync Playback		1/4	1/4/9
Search Mode		Time/Date, MD & Exact search (accurate to second)	
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode		USB Device/Internal SATA burner/Network	
Network			

VT-HCVR4104/4108C-S2-AR

Ethernet	RJ-45 port (10/100M)	
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P	
Max. User Access	128 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
Storage		
Internal HDD	1 SATA port, up to 4TB	
Auxiliary Interface		
USB Interface	2 ports(2 Rear), USB2.0	
General		
Power Supply	DC12V/1.5A	DC12V/2A
Power Consumption	10W(without HDD)	
Working Environment	-10°C ~ +55°C / 10%~90%RH / 86~106kpa	
Dimension(W×D×H)	Smart 1U, 205mm×205mm×40mm	
Weight	0.5KG(without HDD)	

System Connection

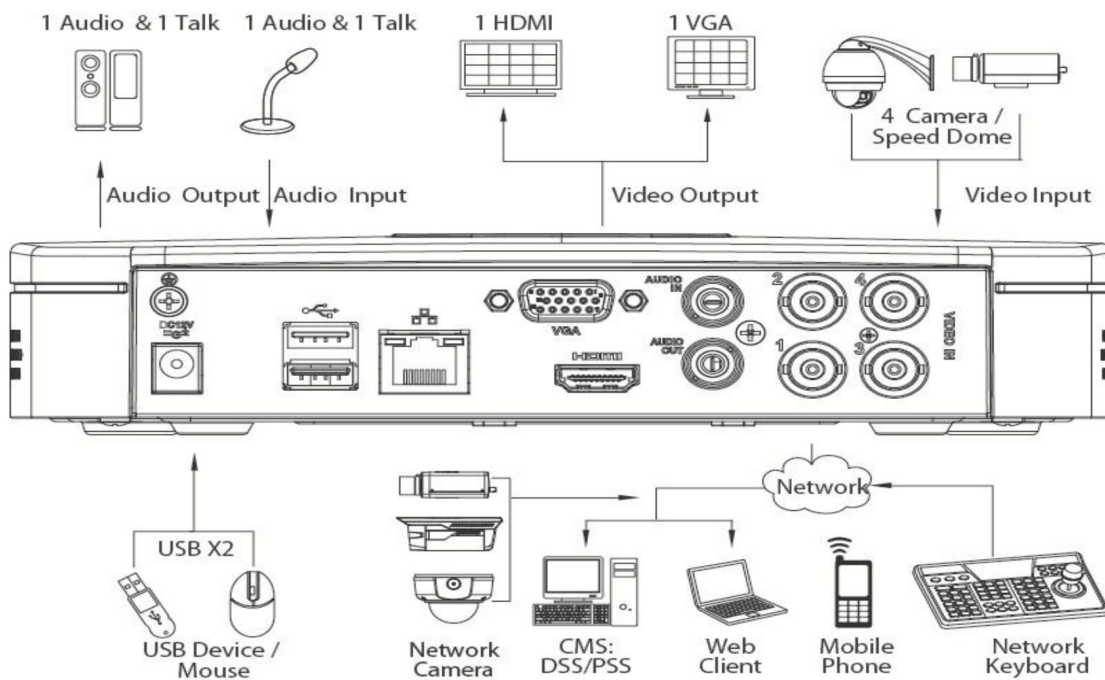

*Takes HCVR4104C-S2 as an example

Distributed in India by :

G8 Infotech Pvt. Ltd.

No. 949, 66th Street,
11th Sector, K.K. Nagar,
Chennai – 600 078
Tamil Nadu, India.

Email: chennai@veetoh.com

Phone: +91 96000 89884

Fax: +91 44 42647475

*Design and specifications are subject to change without notice.