

## VT-NVR4416/4432-AR

### 16/32CH 1.5U Network Video Recorder



## Features

- > Up to 16/32 channel IP camera input
- > H.264/MJPEG dual codec decoding
- > Max 200Mbps incoming bandwidth
- > Up to 5Mp resolution preview&playback
- > HDMI/VGA/TV simultaneous video output
- > 8/16 channel synchronous realtime playback, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek and etc.
- > ONVIF Version 2.4 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 4 SATA HDDs up to 16TB, 1 eSATA port, 2 USB(1 USB3.0)
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

**VT-NVR4416/4432-AR**


**Technical Specifications**

Model	VT-NVR4416-AR	VT-NVR4432-AR
<b>System</b>		
Main Processor	Dual-core embedded processor	
Operating System	Embedded LINUX	
<b>Video&amp; Audio</b>		
IP Camera Input	16 channel	32 channel
Two-way Talk	1channel Input, 1channel Output, RCA	
<b>Display</b>		
Interface	1 HDMI, 1 VGA, 1 TV	
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768	
Display Split	1/4/8/9/16	1/4/8/9/16
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
<b>Recording</b>		
Compression	H.264/MJPEG	
Resolution	5Mp (2560×1920) /3Mp (2048×1536) /1080P(1920×1080) / 720P(1280×720) / D1 (704×576/704×480)&etc.	
Record Rate	200Mbps	
Bit Rate	48~ 8192kbps	
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop	
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
<b>Video Detection &amp; Alarm</b>		
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips	
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank	
Alarm Input	16 channel	
Relay Output	4 channel	
<b>Playback &amp; Backup</b>		
Sync Playback	1/4/8/16	1/4/8/16
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search	
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode	USB Device/Network/Internal SATA burner/eSATA Device	
<b>Network</b>		
Ethernet	1 RJ-45 port (10/100/1000Mbps)	
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)	
Max. User Access	128 users	
Smart Phone	iPhone, iPad, Android	
<b>Storage</b>		
Internal HDD	4 SATA ports, up to 16TB	

## VT-NVR4416/4432-AR

External HDD	1 eSATA port
<b>Auxiliary Interface</b>	
USB	2 ports (1 Rear USB3.0,1 Front USB2.0)
RS232	1 port, For PC communication&Keyboard
RS485	1 port, For PTZ control
<b>General</b>	
Power Supply	AC 100V~240V,50/60HZ
Power Consumption	40W(without HDD)
Working Environment	-10°C ~ +55°C / 10%~90%RH / 86~106kpa
Dimension (W×D×H)	1.5U, 440mm×413mm×75mm
Weight	6KG(without HDD)

## System Connection

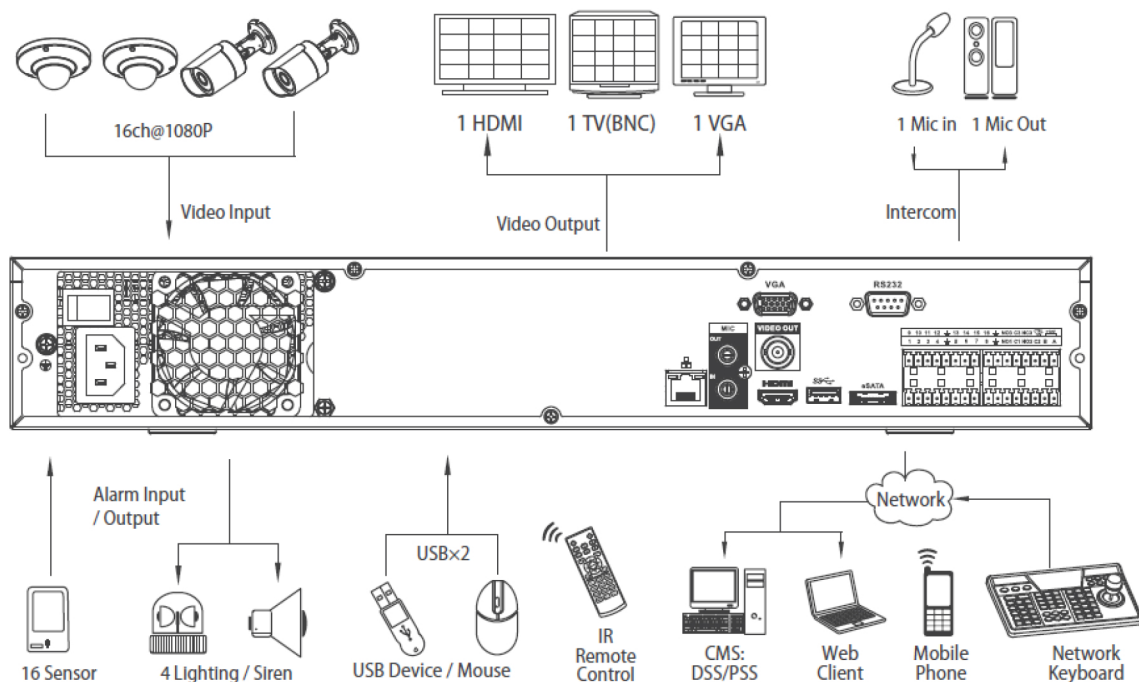

\*Takes NVR4416 as an example

Distributed in India by :

G8 Infotech Pvt. Ltd.

No. 949, 66th Street,  
11th Sector, K.K. Nagar,  
Chennai – 600 078  
Tamil Nadu, India.

Email: [chennai@veetoh.com](mailto:chennai@veetoh.com)

Phone: +91 96000 89884

Fax: +91 44 42647475